

Switching Power Supply Type SPD 480W DIN rail mounting



- Universal AC single phase input full range
- Can also be used as bi-phase 400VAC
- Installation on DIN rail 7.5 or 15mm
- PFC as standard
- High efficiency up to 90%
- Power ready output
- Parallel connection feature
- Compact dimensions
- CE, TÜV, approved and cULus listed
- Class I Div 2 Groups A, B, C, D approved

Product Description

The Switching power application where the supplies SPD series are specially designed to be used in all automation and performance are a must.

Ordering Key

SP D 24 480 1 B

Model _____
 Mounting (D = Din rail) _____
 Output voltage _____
 Output power _____
 Input type _____
 Optional features _____

Input type: 1= single phase

Approvals



Optional Features

Description	Code
Plug-in connectors	B

Output Performances

MODEL NO.	INPUT VOLTAGE	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)
Single Output Models						
SPD24	90~264 VAC	480 WATTS	+ 24 VDC	20 A	86%	89%
SPD48	90~264 VAC	480 WATTS	+ 48 VDC	10 A	87%	90%

¹⁾ When S/P switch is set to parallel, it is not possible to trim output voltage.

Output Data

Line regulation	± 0.5%
Load regulation	
Non parallel model	±1%
Parallel model	±5%
Minimum load	0A
Turn on time (full resistive load)	
VI nom, Io nom	1000ms
VI nom, Io nom with 7000 µF CAP	1500ms
Transient recovery time	2ms
Ripple and noise	100mVpp
Output voltage accuracy	±1%
Temperature coefficient	±0.03%/°C

Hold up time	
Vi= 115VAC	25ms
Vi=230VAC	30ms
Voltage fall time (Io nom Vi nom)	150ms max
Rated continuous loading	
24V Model	20A @ 24VDC/16.8A @ 28.5VDC
48V Model	2.1A @ 48VDC/8.5A @ 56VDC
Reverse voltage	
24V Model	VDC 35
48V Model	VDC 63
Capacitor load	7000µF
Voltage rise time	
Vi nom Io nom	150ms
Vi nom, Io nom with 7000µF CAP	500ms

Input Data

Rated input voltage	115 - 230VAC		Power dissipation		
Voltage range			(Vi : 400VAC, Io nom)	24V Model	63W
AC	90 - 264VAC		48V Model	56W	
DC	120 - 375VDC		Frequency range	47-63Hz	
Rated input current			Leakage current		
(Vi:90VAC, Io nom)	Typ.	4.9/2.5A	Input-Output	0.25mA	
	Max.	7/3.5A	Input-FG	3.5mA	
Inrush current			P.F.C Vi=115/230VAC, Ionom	0.99/0.97	
	Vi= 115VAC	25A			
	Vi= 230VAC	50A			

Controls and Protections

Overload	110 - 140%	Over voltage protection	125/140%
Input fuse	T10A/250VAC internal	Internal surge voltage protection	Varistor
Output short circuit	Fold forward	(IEC 61000-4-5)	
Power ready output threshold at start up	≥17.6-19.4VDC		
Electrical isolation	500VDC		
Contact rating at 60VDC	0.3A		


General Data (@ nominal line, full load, 25°C)

Ambient temperature	-40°C to +71°C	Case material	Metal
Derating (>61°C to +71°C)	2.5%/C	Dimensions LxWxD mm (inch)	
Ambient humidity	20 ~ 95%RH	Screw terminal type	124.5 x 175.5 x 123.6 mm (4.9 x 6.91 x 4.87 inches)
Storage	-40°C to +85°C	Detachable connector type	143.5 x 175.5 x 123.6 mm (5.65 x 6.91 x 4.87 inches)
Protection degree	IP20	Weight	430 g
Cooling	Free air convection		
Pollution degree	2		
MTB (Bellcore issue 6 @ 40°C, GB)			
24V Model	403000 Hours		
48V Model	416000 Hours		


Norms and Standards

Vibration resistance	meet IEC 60068-2-6 (Mounting by rail: 10-500Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)	CE	EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 55024, EN 61000-4-2 Level 4, EN 61000-4-3 Level 3, EN 61000-4-4 Level 4, EN 61000-4-5 L-Level 3, L/N-FG Level 4, EN 61000-4-6 Level 3, EN 61000-4-8 Level 4, EN 61000-4-11, ENV 50204 Level 2, EN 61204-3
Shock resistance	meet IEC 60068-2-27 (15G,11ms, 3 Axis, 6 faces, 3 times for each face)		
UL/cUL	UL508 listed, UL60950-1 Recognized		
TUV	EN 60950-1, CB scheme EN 61558-1, EN 61558-2- 17 (meet EN 60204)		
ISA	12.12.01 Class I Div 2 Groups A, B, C, D		
CCC	Available upon request		


Block Diagram

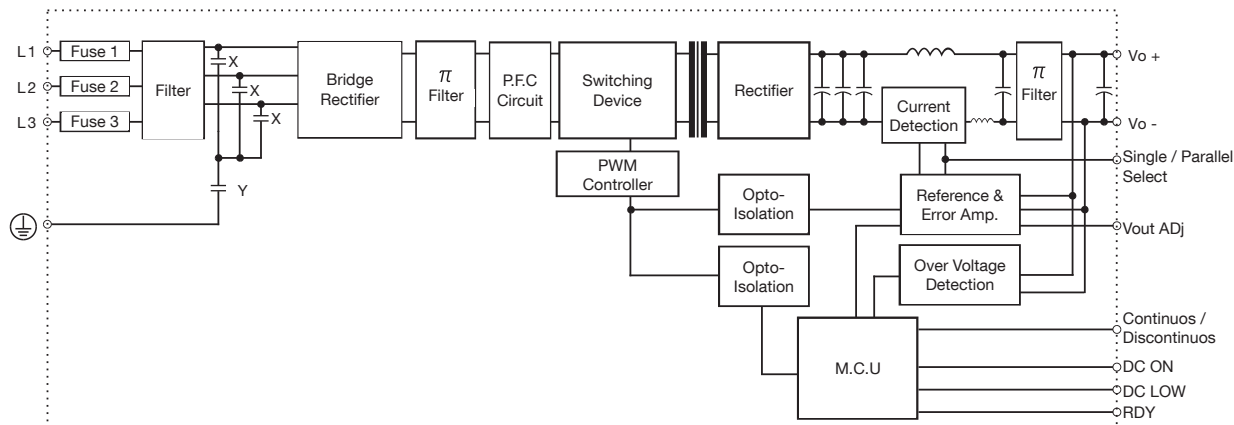


Pin Assignment and Front Controls

Pin No.	Designation	Description
1, 2	V-	Negative output terminal
3, 4	V+	Positive output terminal
5	RDY	A normal open relay contact for DC ON level control
6		(Never connect except 24V model)
7	L	Input terminals (phase conductor, no polarity at DC input)
8	N	Input terminal (neutral conductor, no polarity at DC input)
9		Ground this terminal to minimize high-frequency emissions
	DC ON	Operation indicator LED
	DC LOW	DC LOW voltage indicator LED
	Vout ADJ	Trimmer-potentiometer for Vout adjustment
	S/P	Single / Paralle select switch


Derating Diagram

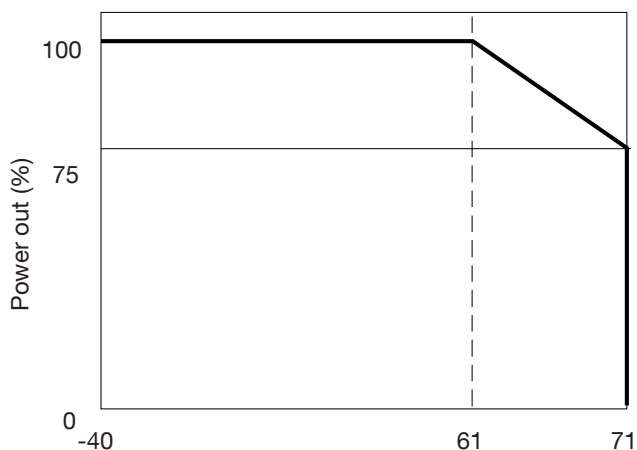


Typ. Efficiency Curve

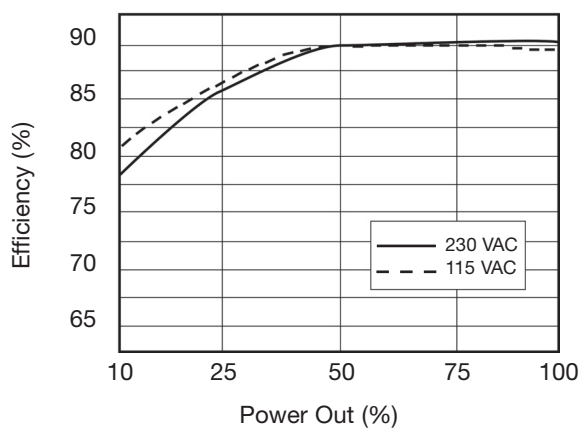

Typ. Current Limited Curve

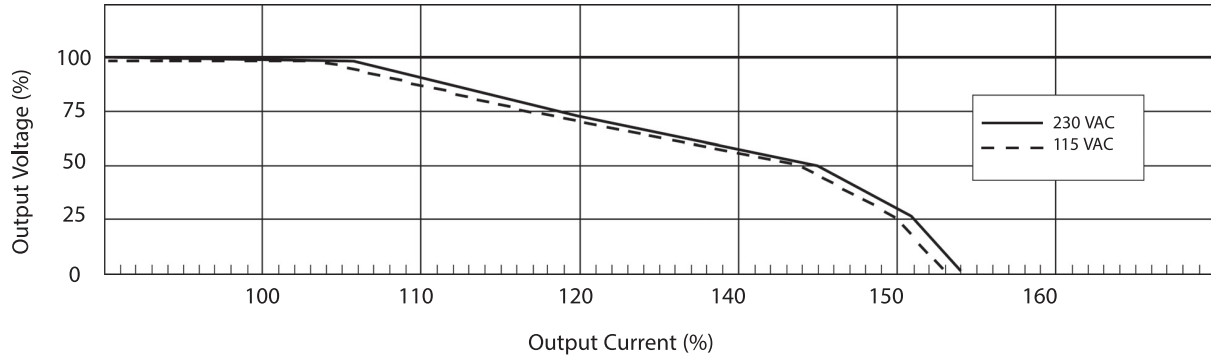

Mechanical Drawings mm (inches)

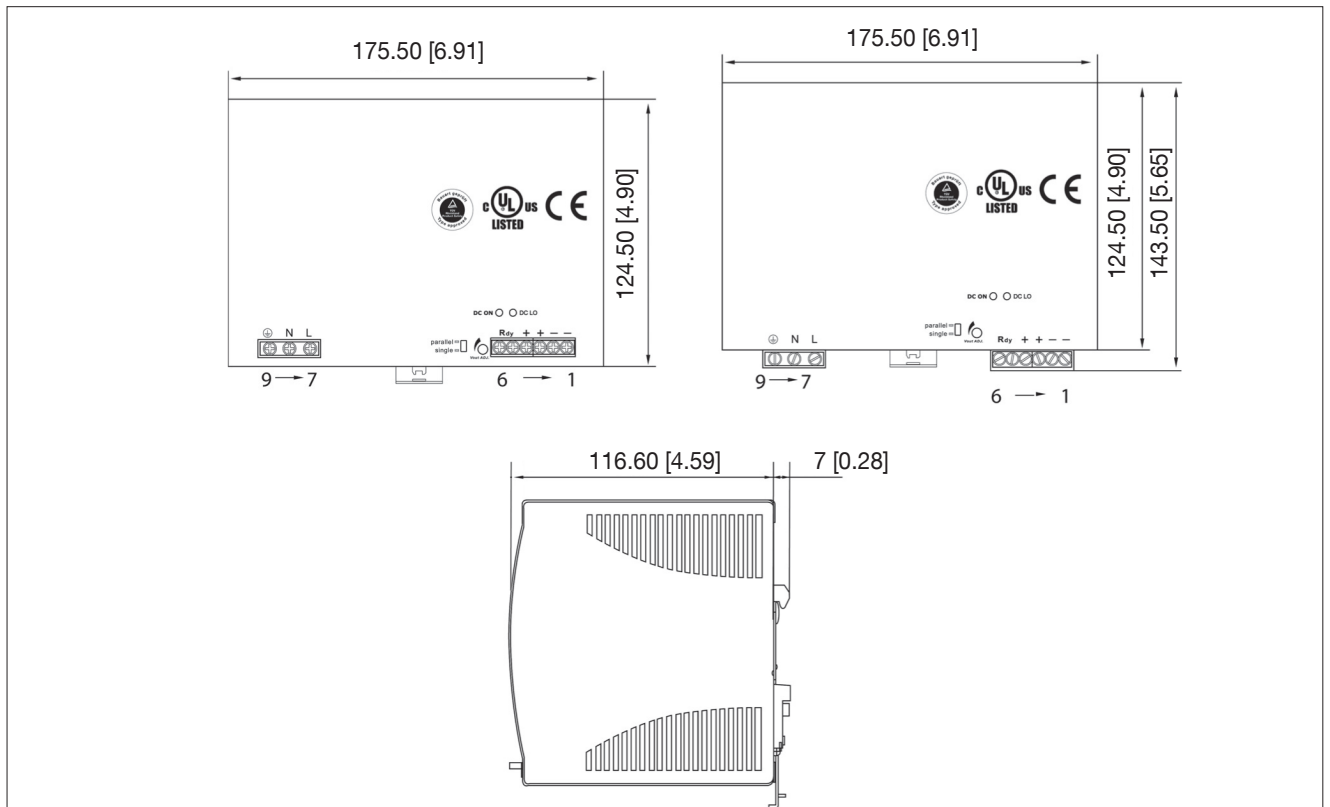

Installation

Ventilation and cooling

Normal convection
 All sides 25mm free space for cooling is recommended.

Connector

Size range AWG 24-10 (0.2~4mm²) flexible/solid cable.

Input Connector

can withstand torque at maximum 9 pound-inches

Output Connector

can withstand torque at maximum 5.5 poundinches. 8 mm strip ping at cable end recom mends, use copper conductors only, 60/75°C.

Max. torque for screws terminals

Input terminals
 Output terminals

0.784Nm (7.0lb-in)
 0.784Nm (7.0lb-in)